


ICTA 1222

Ø40



STF40

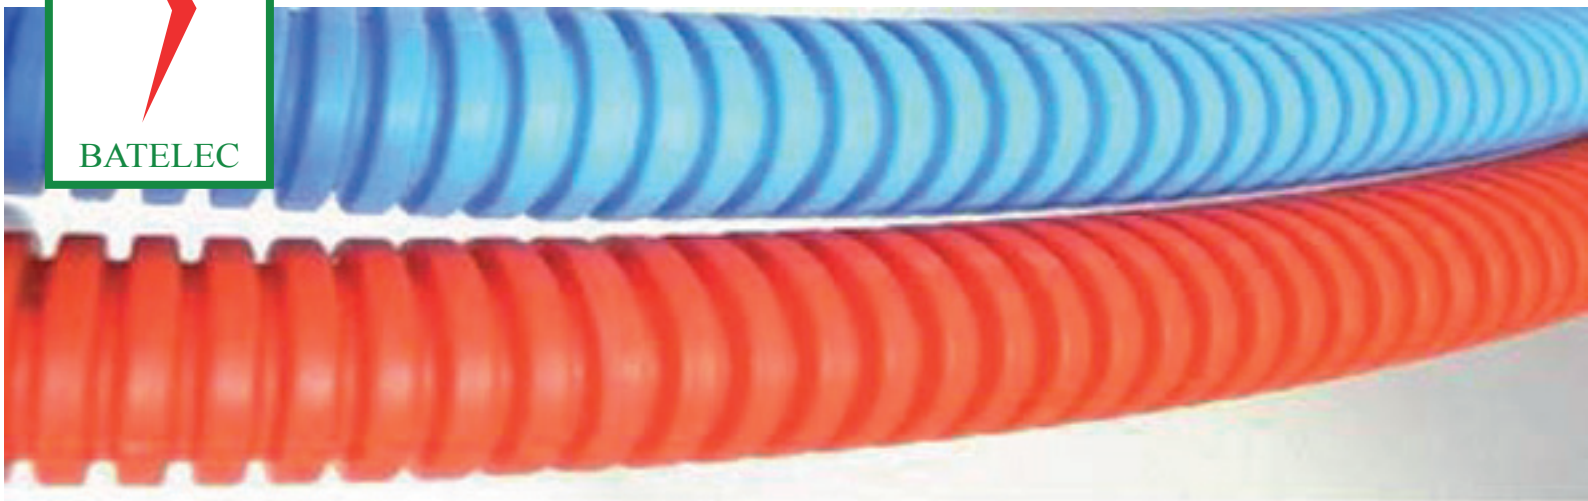

ATF40



40



32.9



25



**CONDUITS ISOLANTS
CINTRABLES,
TRANSVERSALEMENT ANNELÉS
À BASSE ÉMISSION DE FUMÉES ET
SANS HALOGÈNES.**

NORMES

NA CEI 61386 .1
NA CEI 61386.22

RÉSISTANCE À L'ÉCRASEMENT

Classe 1 Très légère (plus de 125 N sur 5cm
à 23 ± 2°C)

RÉSISTANCE AU CHOCS

Classe 2, légère (1 joule à - 5°C)

TEMPÉRATURE MINIMALE D'EXERCICE

Classe 2 (- 5°C)

TEMPÉRATURE MAXIMALE D'EXERCICE

Classe 2 (+ 90°C)

RÉSISTANCE À LA PROPAGATION DE LA FLAMME

Autoextinguible

RÉSISTANCE ÉLECTRIQUE D'ISOLEMENT

Plus de 100 mohm (tension de 500 V pour 1 minute)

RIGIDITÉ DIÉLECTRIQUE

Plus de 2000 V à 50 Hz pendant 15 minutes

**PROTECTIVE INSULATING CONDUITS
CORRUGATED PLIABLE CONDUITS,
SELF RECOVERING, LSOH, HALOGEN-FREE**

STANDARDS

NA CEI 61386 .1
NA CEI 61386.22

COMPRESSION RESISTANCE

Class 1 Very light (higher than 125 N on 5cm
at 23 ± 2°C)

IMPACT RESISTANCE

Class 2, light (1 joule at - 5°C)

MINIMUM TEMPERATURE RANGE

Class 2 (- 5°C)

MAXIMUM TEMPERATURE RANGE

Class 2 (+ 90°C)

FLAME PROPAGATION RESISTANCE

Self-extinguishing

ELECTRIC INSULATING RESISTANCE

Higher than 100 mohm for 500 V in 1 minute

DIELECTRIC STRENGTH

Higher than 2000 V at 50 Hz for 15 minutes