


ICTA 2222

Ø 63



STF63

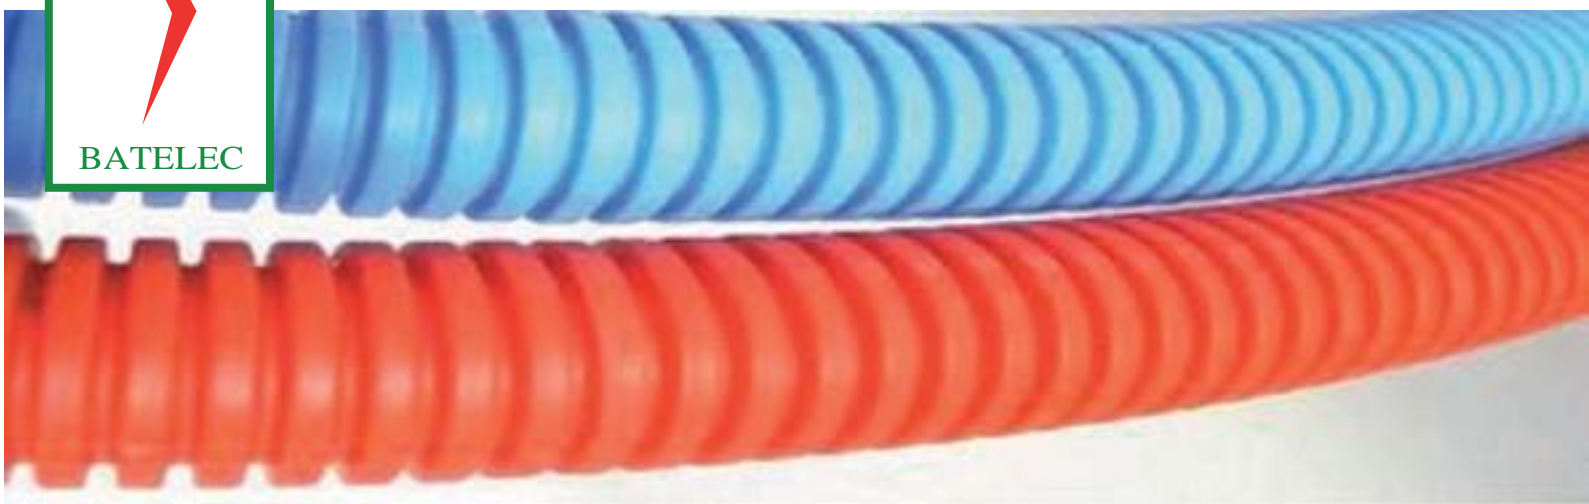

ATF63



63



53



25



**CONDUITS ISOLANTS
CINTRABLES,
TRANSVERSALEMENT ANNELÉS
À BASSE ÉMISSION DE FUMÉES ET
SANS HALOGÈNES.**

NORMES

NA CEI 61386 .1
NA CEI 61386.22

RÉSISTANCE À L'ÉCRASEMENT

Classe 2 légère (plus de 320 N sur 5cm à 23 ± 2°C)

RÉSISTANCE AU CHOCS

Classe 2, Légère (1 joule à - 5°C)

TEMPÉRATURE MINIMALE D'EXERCICE

Classe 2 (-5°C)

TEMPÉRATURE MAXIMALE D'EXERCICE

Classe 2 (+90°C)

RÉSISTANCE À LA PROPAGATION DE LA FLAMME

Autoextinguible

RÉSISTANCE ÉLECTRIQUE D'ISOLEMENT

Plus de 100 mohm (tension de 500 V pour 1 minute)

RIGIDITÉ DIÉLECTRIQUE

Plus de 2000 V à 50 Hz pendant 15 minutes

**PROTECTIVE INSULATING CONDUITS
CORRUGATED PLIABLE CONDUITS,
SELF RECOVERING, LSOH, HALOGEN-FREE**

STANDARDS

NA CEI 61386 .1
NA CEI 61386.22

COMPRESSION RESISTANCE

Class 2 light (higher than 320 N on 5cm at 23 ± 2°C)

IMPACT RESISTANCE

Class 2, light (1 joule at - 5°C)

MINIMUM TEMPERATURE RANGE

Class 2 (-5°C)

MAXIMUM TEMPERATURE RANGE

Class 2 (+90°C)

FLAME PROPAGATION RESISTANCE

Self-extinguishing

ELECTRIC INSULATING RESISTANCE

Higher than 100 mohm for 500 V in 1 minute

DIELECTRIC STRENGTH

Higher than 2000 V at 50 Hz for 15 minutes